

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
10 April 2003 (10.04.2003)

PCT

(10) International Publication Number
WO 03/029556 A1

(51) International Patent Classification: D07B 1/22, 1/16

Road, Farmington, CT 06032 (US). DERWINSKI, Patricia, A.; 22 Bungalow Hill Road, Farmington, CT 06032 (US). O'DONNELL, Hugh, James; 289 Converse Street, Longmeadow, MA 01106 (US).

(21) International Application Number: PCT/US02/29817

(22) International Filing Date:

19 September 2002 (19.09.2002)

(74) Agent: O'BRIEN, Sean, W.; Deputy Intellectual Property Counsel, Ten Farm Springs, Farmington, CT 06032 (US).

(25) Filing Language:

English

(81) Designated States (national): CN, JP, KR.

(26) Publication Language:

English

(30) Priority Data:

09/970,587

4 October 2001 (04.10.2001) US

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).

(71) Applicant: OTIS ELEVATOR COMPANY [US/US]; Intellectual Property Department, Ten Farm Springs, Farmington, CT 06032 (US).


Published:

— with international search report

(72) Inventors: PITTS, John; 102 Parkview Drive, Avon, CT 06001 (US). SWAYBILL, Bruce; 22 Bungalow Hill

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELEVATOR BELT ASSEMBLY WITH NOISE REDUCING GROOVE ARRANGEMENT

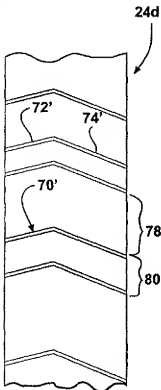

(57) Abstract: An elevator load bearing assembly includes a plurality of cords within a jacket. The jacket has a plurality of grooves spaced along the length of the belt assembly. In one example, the grooves are separated by varying spacings along the length of the belt. In another example, at least a portion of each groove is aligned at a non-right angle relative to the longitudinal axis of the belt. Another example includes a combination of the different spacings and the non-perpendicular alignment. The inventive belt assembly minimizes the possibility for generating an annoying, audible sound and vibration during elevator operation.

WO 03/029556 A1

ELEVATOR BELT ASSEMBLY WITH NOISE REDUCING GROOVE ARRANGEMENT

BACKGROUND OF THE INVENTION

- [1] This invention generally relates to load bearing members for use in elevator systems. More particularly, this invention relates to an elevator belt assembly having a specialized groove arrangement.
- [2] Elevator systems typically include a cab and counterweight that move within a hoistway to transport passengers or cargo to different landings within a building, for example. A load bearing member, such as roping or a belt typically moves over a set of sheaves and supports the load of the cab and counterweight. There are a variety of types of load bearing members used in elevator systems.
- [3] One type of load bearing member is a coated steel belt. Typical arrangements include a plurality of steel cords extending along the length of the belt assembly. A jacket is applied over the cords and forms an exterior of the belt assembly. Some jacket application processes result in grooves being formed in the jacket surface on at least one side of the belt assembly. Some processes also tend to cause distortions or irregularities in the position of the steel cords relative to the exterior of the jacket along the length of the belt.
- [4] Figure 8, for example, illustrates both of these phenomena. As can be seen, the spacing between the exterior of the jacket 200 and the cords 210 varies along the length of the belt. As can be appreciated from the illustration, the cords 210 are set within the jacket as if they comprise a series of cord segments of equal length corresponding to the groove spacing. The illustration of Figure 8 includes an exaggeration of the typical physical cord layout for purposes of illustration. The

actual distortions or changes in the position of the cords relative to the jacket outer surfaces may not be discernable by the human eye in some examples.

[5] When conventional jacket application processes are used, the manner in which the cords are supported during the jacket application process tends to result in such distortion in the geometry or configuration of the cords relative to the jacket outer surfaces along the length of the belt.

[6] While such arrangements have proven useful, there is need for improvement. One particular difficulty associated with such belt assemblies is that as the belt moves in the elevator system, the grooves and the cord placement in the jacket interact with other system components such as the sheaves and generate undesirable noise, vibration or both. For example, as the belt assembly moves at a constant velocity, a steady state frequency of groove contact with the sheaves creates an annoying, audible tone. The repeated pattern of changes in the cord spacing from the jacket outer surfaces is believed to contribute to such noise generation.

[7] An alternative arrangement is required to minimize or eliminate the occurrence of vibrations or an annoying tone during elevator system operation. This invention addresses that need.

SUMMARY OF THE INVENTION

[8] In general terms, this invention is a belt assembly for use in an elevator system. The belt assembly includes a plurality of cords extending generally parallel to a longitudinal axis of the belt. A jacket over the cords includes a plurality of grooves that are situated to minimize the occurrence of an annoying audible tone during elevator operation.

- [9] In one example, the grooves are longitudinally spaced such that spacings between the grooves varies along the length of the belt. Having different spacings between adjacent grooves eliminates the steady state frequency of groove contact with other system components, which is a major contributor to the potential for undesirable noise or vibration during elevator operation.
- [10] In another example, the grooves extend across the width of the jacket. At least a portion of each of the grooves is aligned to be not perpendicular to the longitudinal axis of the belt. In one example, the grooves comprise straight lines. In another example, the grooves comprise a series of line segments, each of which is at a different angle relative to the longitudinal axis of the belt.
- [11] A belt assembly designed according to this invention may include the inventive different spacings, the inventive angular alignment of the grooves or a combination of both. The various features and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the currently preferred embodiments. The drawings that accompany the detailed description can be briefly described as follows.

BRIEF DESCRIPTION OF THE DRAWINGS

- [12] Figure 1 schematically illustrates a portion of an example belt assembly designed according to an embodiment of this invention.
- [13] Figure 2 is a cross-sectional illustration taken along the lines 2-2 in Figure 1.
- [14] Figure 3 is a planar, schematic illustration of an alternative groove alignment compared to the embodiment of Figure 1.
- [15] Figure 4 schematically illustrates another alternative groove alignment.
- [16] Figure 5 schematically illustrates another alternative groove alignment.

- [17] Figure 6 schematically illustrates another alternative groove alignment.
- [18] Figure 7 schematically illustrates a device and method useful for making a belt assembly designed according to an embodiment of this invention.
- [19] Figure 8 schematically illustrates a typical cord geometry relative to outer surfaces on a belt jacket according to the prior art.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [20] Figures 1 and 2 schematically illustrate a belt assembly 20 that is designed for use in an elevator system. A plurality of cords 22 are aligned generally parallel to a longitudinal axis of the belt assembly 20. In one example, the cords 22 are made of strands of steel wire.
- [21] A jacket 24 covers over the cords 22. The jacket 24 preferably comprises a polyurethane-based material. A variety of such materials are commercially available and known in the art to be useful for elevator belt assemblies. Given this description, those skilled in the art will be able to select a proper jacket material to suit the needs of their particular situation.
- [22] The jacket 24 establishes an exterior length, L, width, W, and a thickness, t, of the belt assembly 20. In one example, the width W of the belt assembly is 30 millimeters, the thickness t is 3 millimeters and the depth of each groove is 0.7 millimeters. In the same example, the cords 22 have a diameter of 1.65 millimeters. The cords 22 preferably extend along the entire length L of the assembly.
- [23] The jacket 24 includes a plurality of grooves 30, 32, 34, 36, 38, 40 and 42 on at least one side of the jacket 24. In the illustrated example, the grooves extend across the entire width of the belt assembly.

[24] The grooves result from some manufacturing processes, many of which are well known in the art, that are suitable for formation of the belt assembly 20. In the example embodiment of Figures 1 and 2, the grooves are spaced apart different distances so that there are different spacings between various grooves. For example, a first spacing 44 separates the groove 30 from the adjacent groove 32. A different spacing 46 separates the groove 32 from the adjacent groove 34. Similarly, the spacings 48, 50, 52 and 54 vary in size.

[25] It is not necessary that all of the illustrated spacings are different, however, it is preferred to provide as many different spacings along the length of the belt assembly as possible. As a practical matter, a repeated pattern of the varying spacings will typically extend along the entire length of the belt assembly 20. Depending on the particulars of the belt assembly and the equipment used to form and apply the jacket 24, the pattern of different spacings will repeat at different intervals. Preferably, the interval of pattern repetition will be as large as the manufacturing equipment allows. In one example, there is a pattern of different spacings that repeats about every two meters. Within each two meter section, the spacings between adjacent grooves are selected to be varying and non-periodic.

[26] By altering spacings between adjacent grooves, the noise component, caused by contact of the belt assembly with other elevator system components, such as the sheaves, during system operation, is spread over a broader range of frequencies. Thus, steady state frequencies of noise are avoided which eliminates the potential for an audible, annoying tone.

[27] In addition to varying the spacing between the grooves, the inventive arrangement provides the ability to vary the lengths of cord "segments," which result from certain manufacturing techniques (but are not necessarily included in the

inventive arrangement). A belt assembly designed according to this invention may include a series of cord segments along which the distance between the cord and the jacket outer surfaces varies. The ends of such cord "segments" coincide with the location of the grooves. Varying the spacing of the grooves also varies the length of the segments and therefore varies the pattern of the cord geometry relative to the jacket outer surfaces. With the inventive arrangement, the length of the cord segments varies along the length of the belt.

[28] Because the segments are of various lengths, there is no periodic, repeated geometric pattern of the cords relative to the jacket outer surfaces. By varying the length of the cord segments (i.e., changing spacing between similar distortions in the position of the cord relative to the jacket outer surfaces) any contribution to noise or vibration caused by the cord geometry, is reduced or eliminated.

[29] By eliminating the periodic feature of the cord geometry, this invention provides a significant advantage for reducing vibration and noise generation during elevator system operation.

[30] Figures 3 through 6 illustrate various strategies according to this invention for avoiding noise levels caused by belt movement during elevator operation. The example of Figure 3 includes a jacket 24a having a plurality of grooves 56. In this example, an equal spacing 58 separates adjacent grooves 56. The grooves 56 comprise straight lines extending across the width of the belt assembly. Each groove 56 is at an acute angle 60 relative to the longitudinal axis of the belt. Whether the angle of groove alignment is acute or obtuse depends only on a frame of reference. Arranging at least a portion of the grooves 56 to be non-perpendicular to the longitudinal axis of the belt avoids the steady state frequency of noise

generation, that otherwise occurs when perpendicularly aligned grooves (and associated cord distortions) are equally spaced along the length of the belt.

[31] The example of Figure 4 includes a jacket 24b having a plurality of grooves 56'. The grooves 56' are spaced apart using different spacings 62, 64 and 66, for example. The grooves 56' are aligned at an acute angle 60 relative to the longitudinal axis of the belt. The example of Figure 4 combines the inventive angular alignment of the grooves with the inventive varying spacing strategy, either or both of which can be employed in the present invention.

[32] Figure 5 illustrates another example belt assembly having a jacket 24c. In this example, a plurality of grooves 70 each have a plurality of line segments 72 and 74. In the example of Figure 5, the grooves 70 are equally spaced using a spacing 76. Because the line segments 72 and 74 are not perpendicular to the longitudinal axis of the belt, the equal spacing does not present the noise generation difficulties provided if the grooves 70 were straight lines that were perpendicular to the longitudinal axis of the belt.

[33] The example of Figure 6 includes a jacket 24d that has a plurality of grooves 70', each of which includes line segments 72' and 74'. In this example, different spacings 78 and 80, for example, separate each of the grooves from an adjacent groove.

[34] With reference to Figure 7, the process of making an elevator belt assembly designed according to this invention is schematically illustrated by machinery 100. The cords 22 move through the machinery 100 which provides a mold for forming the jacket 24.

[35] The machinery 100 includes a plurality of cord supports 110. In the case of forming the belt assemblies of Figures 1, 4 and 6, the spacing between the cord

supports is variable. Although the spacing between two adjacent cord supports 110 may be the same, it is preferred that the spacing between the cord supports 110 not be arranged in a repeating pattern. Preferably, the spacing should be randomized within an acceptable range that will depend on the machinery.

[36] As the cords 22 are fed through the machinery 100 they are supported on each of the cord supports. In examples where the cords 22 are fed continuously, the cord supports 110 move as the cords 22 are fed through the machinery 100. A polyurethane-based jacket material is fed into the machinery from a reservoir 122 in a conventional manner. As the jacket material envelopes the cords 22, the cord supports cause grooves to be formed in the jacket. The machinery preferably causes an opposite side of the jacket 24 to be flat. The machinery 100 operates in a known manner to extrude, mold or otherwise form the jacket 24 around the cords 22.

[37] Providing different spacing between the cord supports yields different spacing between the grooves along the length of the belt.

[38] In another example, as in forming the belt assemblies of Figures 3-6, the cord supports have a configuration that provides a desired groove alignment on the exterior surface of the jacket 24. Example groove configurations and alignments are shown in Figures 3-6, but this invention is not limited to those examples.

[39] By placing the grooves in a desired alignment, the difficulties of audible noise generation experienced with conventional coated belt assemblies can be at least greatly reduced and usually eliminated. Providing different spacings between grooves or a properly selected angular alignment of at least a part of each groove, or a combination of both results in a much quieter arrangement.

[40] The preceding description is exemplary rather than limiting in nature. Variations and modifications to the disclosed examples may become apparent to

those skilled in the art that do not necessarily depart from the essence of this invention. The scope of legal protection given to this invention can only be determined by studying the following claims.

CLAIMS

We claim:

1. An elevator belt assembly, comprising:
a plurality of cords aligned generally parallel to a longitudinal axis of the belt; and
a jacket over the cords, the jacket including a plurality of grooves spaced longitudinally on at least one side of the jacket such that spacings between adjacent grooves vary along a length of the belt assembly.
2. The assembly of claim 1, wherein three sequential ones of the spacings between the grooves are all different from one another.
3. The assembly of claim 1, wherein the grooves extend across the width of the jacket and wherein at least a portion of each of the grooves is aligned not perpendicular to the longitudinal axis of the belt.
4. The assembly of claim 1, wherein the grooves extend across the width of the jacket and wherein the grooves are aligned generally perpendicular to the longitudinal axis of the belt.
5. The assembly of claim 1, wherein each groove comprises a plurality of line segments and at least one of the segments is at a non-right angle relative to the longitudinal axis of the belt.

6. The assembly of claim 1, wherein the cords comprise steel wires and the jacket comprises an elastomer.
7. The assembly of claim 6, wherein the elastomer comprises polyurethane.
8. An elevator belt assembly, comprising:
a plurality of cords aligned generally parallel to a longitudinal axis of the belt; and
a jacket over the cords and including a plurality of longitudinally spaced grooves on at least one side of the jacket, at least a portion of each groove being not perpendicular to the longitudinal axis.
9. The assembly of claim 8, wherein spacings between adjacent grooves vary along a length of the belt assembly.
10. The assembly of claim 8, wherein the grooves extend across the width of the jacket and wherein each groove comprises a generally straight line.
11. The assembly of claim 8, wherein the grooves extend across the width of the jacket and wherein each groove comprises a plurality of line segments, wherein at least one of the segments is at an acute angle relative to the longitudinal axis of the belt.
12. The assembly of claim 11, wherein each line segment of a particular one of the grooves is at a different angle relative to the longitudinal axis.

13. The assembly of claim 8, wherein the cords comprise steel wires and the jacket comprises as elastomer.
14. The assembly of claim 13, wherein the elastomer comprises polyurethane.
15. A method of making an elevator belt assembly having a plurality of cords within a jacket, comprising the steps of:
- (a) aligning the plurality of cords in a selected arrangement; and
 - (b) applying the jacket to the cords while supporting the cords such that the applied jacket includes a plurality of longitudinally spaced grooves formed in the jacket where the grooves are at least one of
 - disposed at least in part at a non-right angle to the longitudinal axis, and
 - spaced at varying longitudinal intervals.
16. The method of claim 15 including spacing the grooves such that three sequential spacings between the grooves are all different from each other.
17. The method of claim 15 wherein the grooves are aligned generally perpendicular to the longitudinal axis of the belt.
18. The method of claim 15 wherein at least a portion of each of the grooves is aligned at an acute angle to the longitudinal axis of the belt.

19. An elevator belt, comprising:
- a plurality of cords aligned generally parallel to a longitudinal axis of the belt; and
- a jacket over the cords and having a plurality of longitudinally spaced grooves on a side of the jacket, the grooves being at least one of
- disposed in part at a non-right angle to the longitudinal axis, and
- spaced at varying longitudinal intervals.
20. The belt of claim 19 wherein the grooves are disposed at least in part at a non-right angle to the longitudinal axis and spaced at varying longitudinal intervals.
21. The elevator belt of claim 19, wherein three sequential ones of the longitudinal intervals are all different from each other.
22. The elevator belt of claim 19, wherein a first portion of each groove is disposed at a first non-right angle to the longitudinal axis and a second portion of each groove is disposed at a second non-right angle to the longitudinal axis.

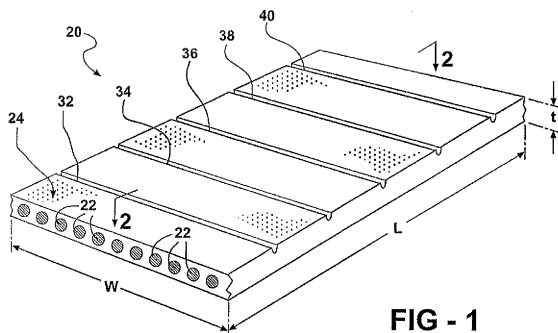
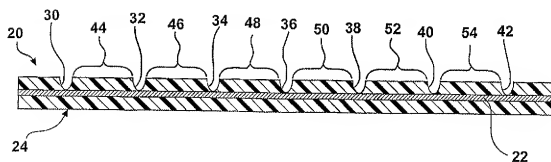


FIG - 2



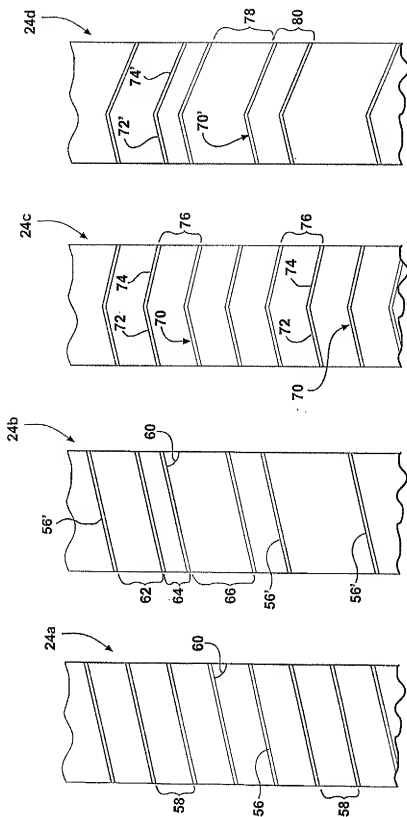


FIG - 3

FIG - 4

FIG - 5

FIG - 6

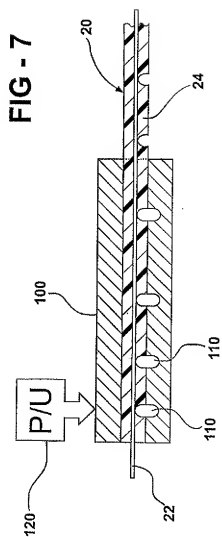


FIG - 8
PRIOR ART



INTERNATIONAL SEARCH REPORT

Final Application No.

PCT/US 02/29817

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D07B1/22 D07B1/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D07B B66B F16G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 00 37738 A (OTIS ELEVATOR CO) 29 June 2000 (2000-06-29) abstract; figures 1-4 page 9, line 26 ---	1-22
Y	US 5 055 090 A (MIRANTI JR JOSEPH P) 8 October 1991 (1991-10-08)	1,2,4, 9-11, 16-18,21
A	column 1, line 35 - line 41; figures 3,8 column 4, line 37 - line 64 ---	1,8,19
Y	US 5 382 198 A (JANNE MICHEL L) 17 January 1995 (1995-01-17) column 2, line 25 - column 3, line 13; figure 1 ---	3,5-8, 13-15, 19,21
A	----- -/-	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document number of the same patent family

Date of the actual completion of the international search

25 November 2002

Date of mailing of the international search report

19/12/2002

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlean 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 opt nl,
Fax: (+31-70) 340-3010

Authorized officer

Janssens, G

INTERNATIONAL SEARCH REPORT

onal Application No

PCT/US 02/29817

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 40 16 469 A (CONTINENTAL AG) 28 November 1991 (1991-11-28)	20
A	abstract; figure 1 -----	19
Y	EP 0 520 781 A (XEROX CORP) 30 December 1992 (1992-12-30)	12, 22
A	figures 2A, 2C -----	8, 19

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent Application No

PCT/US 02/29817

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0037738	A	29-06-2000	BR	9908227 A		31-10-2000
			BR	9908228 A		31-10-2000
			BR	9908230 A		31-10-2000
			BR	9908303 A		04-09-2001
			BR	9908304 A		31-10-2000
			BR	9908305 A		31-10-2000
			BR	9916369 A		04-06-2002
			CN	1292051 T		18-04-2001
			CN	1291960 T		18-04-2001
			CN	1313827 T		19-09-2001
			CN	1342130 T		27-03-2002
			CN	1298367 T		06-06-2001
			CN	1299333 T		13-06-2001
			CN	1331768 T		16-01-2002
			EP	1028911 A1		23-08-2000
			EP	1064216 A2		03-01-2001
			EP	1056676 A1		06-12-2000
			EP	1056679 A2		06-12-2000
			EP	1056675 A1		06-12-2000
			EP	1060305 A1		20-12-2000
			EP	1042209 A2		11-10-2000
			EP	1042210 A2		11-10-2000
			EP	1042211 A1		11-10-2000
			EP	1037847 A2		27-09-2000
			EP	1023236 A1		02-08-2000
			EP	1066213 A1		10-01-2001
			EP	1097101 A1		09-05-2001
			EP	1097102 A1		09-05-2001
			EP	1153167 A1		14-11-2001
			JP	2002504469 T		12-02-2002
			JP	2002504470 T		12-02-2002
			JP	2002504471 T		12-02-2002
			JP	2002504472 T		12-02-2002
			JP	2002504473 T		12-02-2002
			JP	2002505240 T		19-02-2002
			JP	2002533276 T		08-10-2002
			TW	458938 B		11-10-2001
			WO	9943592 A1		02-09-1999
			WO	9943591 A1		02-09-1999
			WO	9943590 A1		02-09-1999
			WO	9943595 A2		02-09-1999
			WO	9943589 A1		02-09-1999
			WO	9943600 A1		02-09-1999
			WO	9943602 A1		02-09-1999
			WO	9943593 A1		02-09-1999
			WO	9943601 A2		02-09-1999
WO	9943599 A1		02-09-1999			
WO	9943885 A1		02-09-1999			
WO	9943596 A2		02-09-1999			
WO	9943598 A2		02-09-1999			
US 5055090	A	08-10-1991	US	4832670 A		23-05-1989
			US	4884998 A		05-12-1989
			US	4938736 A		03-07-1990
			US	4976662 A		11-12-1990
US 5382198	A	17-01-1995	AT	160850 T		15-12-1997
			AU	683822 B2		20-11-1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 02/29817

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5382198 A		AU 2360397 A	14-08-1997
		AU 5783594 A	10-08-1995
		BR 9401334 A	17-10-1995
		CA 2116938 A1	27-07-1995
		CN 1106114 A ,B	02-08-1995
		DE 69407155 D1	15-01-1998
		DE 69407155 T2	10-06-1998
		DK 665391 T3	10-08-1998
		EP 0665391 A1	02-08-1995
		ES 2111787 T3	16-03-1998
		JP 7208559 A	11-08-1995
		SG 43197 A1	17-10-1997
DE 4016469 A	28-11-1991	DE 4016469 A1	28-11-1991
EP 0520781 A	30-12-1992	US 5211608 A	18-05-1993
		CA 2061079 A1	28-12-1992
		DE 69213361 D1	10-10-1996
		DE 69213361 T2	20-02-1997
		EP 0520781 A1	30-12-1992
		JP 2531902 B2	04-09-1996
		JP 5202989 A	10-08-1993
		US 5215504 A	01-06-1993